



OSP – Optimized Sanding Process



Paint removal / Feather edge

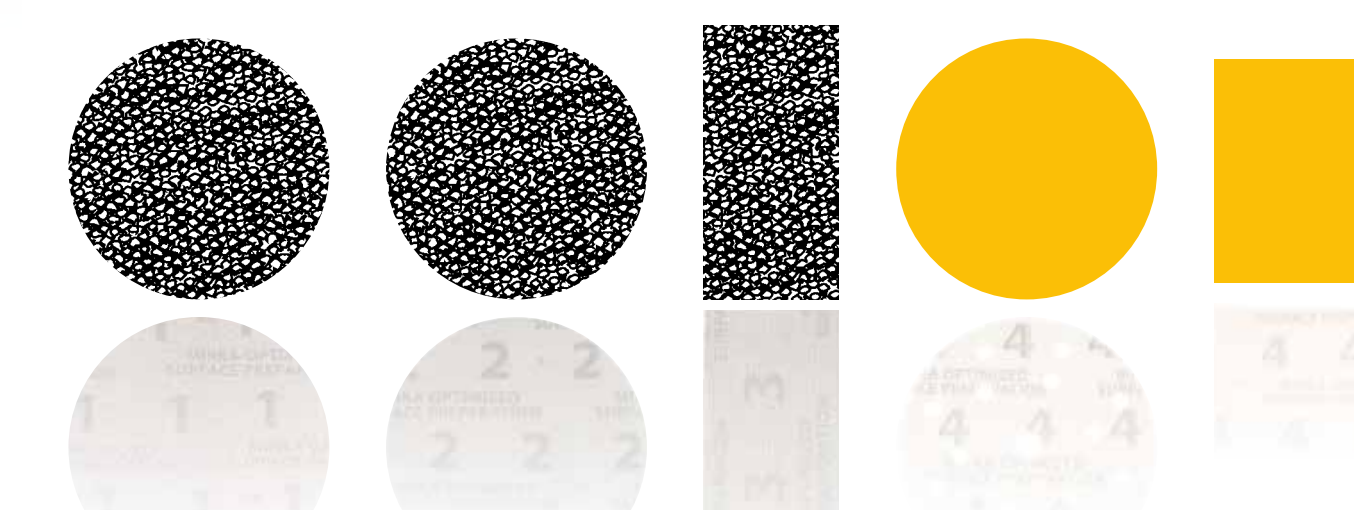

OSP product

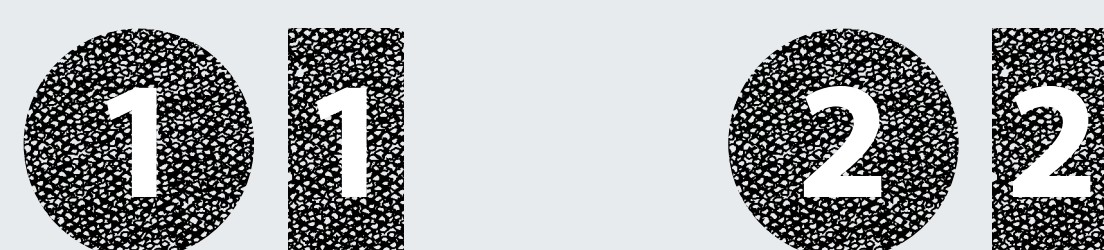

Use:


- Disc or strip No 1 for paint removal.
- Disc or strip No 2 for feather edge.

Polyester filler application

Polyester filler



OSP product

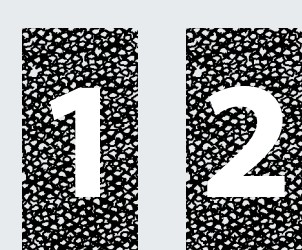

Use:

- Strip No 1 to level polyester filler.
- Strip No 2 for final levelling and as first step on fine polyester filler.

Primer preparation



OSP product



Use:

- Disc No 3 to prepare the repaired area for primer by reducing scratches and expanding the feather edge.

Primer filler application

Finishing



OSP product



Use:

- Disc or strip No 3 to level structure on primer.
- Finalize the sanding with disc No 4.

✓ **Simple**



Solution Trolley

✓ **Efficient**



PROS Pneumatic tool

✓ **Quality**



Square sander 70 x 198 mm

✓ **Dust-free**



Dust extractor 915 M

✓ **Profitable**



OSP Abrasives 1-4

